

Healthy living starts with i-water

4-stage Filter Replacement 四重濾芯更換時間表

Filter 濾芯	Replacement 更換時間	
	Up to 1,500 gal or 6 months 1,500 加侖或6個月	Up to 3,000 gal or 12 months 3,000 加侖或12個月
Sediment Filter 沉澱物濾芯	✓	
Pre-carbon Filter 前置式活性炭濾芯	✓	
Hollow Fiber Membrane 中空絲膜濾芯		✓
Post-carbon Filter 後置式活性炭濾芯	✓	

3-stage Filter Replacement 三重濾芯更換時間表

Filter 濾芯	Replacement 更換時間	
	Up to 1,500 gal or 6 months 1,500 加侖或6個月	Up to 3,000 gal or 12 months 3,000 加侖或12個月
Sediment Filter 沉澱物濾芯	✓	
Hollow Fiber Membrane 中空絲膜濾芯		✓
Post-carbon Filter 後置式活性炭濾芯	✓	

Operation Conditions 操作條件

- Flow rate: 0.5gpm (1.9 L)
流量：0.5加侖/分鐘 (1.9升)
- Temperature: 33 ~ 100°F (4 ~ 38°C)
水溫：33 ~ 100°F (4 ~ 38°C)
- Working pressure: 7 ~ 60 psi (0.5 ~ 4.2 kg)
水壓：7 ~ 60 磅/平方英寸 (0.5 ~ 4.2 公斤)

Test Report 驗水報告



Model 型號:100-3UF

Model 型號:100-4UF



Since 1973

飛達工程貿易有限公司

FABRI-TECHNIC ENGINEERING & TRADING CO. LTD.

香港北角英皇道677號榮華工業大廈17樓

17/F, Wing Wah Industrial Building, 677 King's Road, North Point, Hong Kong

Tel: (852) 2815 8388 Fax: (852) 2815 3223

Website: www.fabri-technic.com Email: enquiry@fabri-technic.com

i-water Quick Change Filtration System

- Innovative** — Patented Quick Change Filter Replacement
- Convenient** — Instant Kitchen Convenience
- Compact** — Simply the Best for Under-sink
- Clean** — Clean and Fresh
- Health** — Retain Minerals Retain Health

韓國製品
Made in Korea



Water Filter System 淨水系統

SEDIMENT FILTER (5 microns)

Eliminates dirt, grit, sand, rust and other solid particles that can damage equipment and give longer life to the rear filters.

沉澱物濾芯 (5微米)

過濾泥沙、鐵銹及雜質，延長前置式活性炭濾芯的壽命，及避免設備受損。

PRE-CARBON FILTER

Removes dissolved trihalomethanes (THMs) and absorbs chlorine, undesirable taste and odour in water.

前置式活性炭濾芯

消除三鹵甲烷，吸收水中的氯及其他異味。

Hollow Fiber Membrane (0.01 micron)

Spun with highly integrated techniques, hollow fiber membrane filter shows excellent water permeability. Using polysulfone as a membrane forming material, it has excellent chemical and heat resistance. Hollow fiber membrane filters out all harmful micro-organisms and bacteria yet preserves minerals.

中空絲膜濾芯 (0.01微米)

濾芯採用緊密編織技術，把耐熱物料紡成中空絲膜，滲透性特高。中空絲膜濾芯能過濾有害微生物及細菌，保留水中礦物質。

Post-carbon Filter

Removes dissolved trihalomethanes (THMs) and absorbs chlorine, undesirable taste and odour in water.


後置式活性炭濾芯

消除三鹵甲烷，吸收水中的氯及其他異味。

Installation 安裝方法


Choice 1 Under-sink installation

選擇一 櫥下式安裝

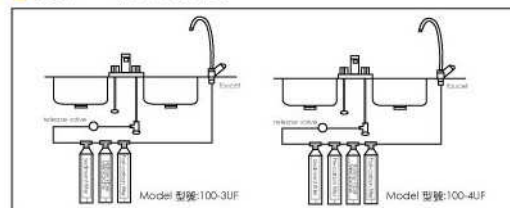

Choice 2 Wall-mounted installation

選擇二 掛牆式安裝

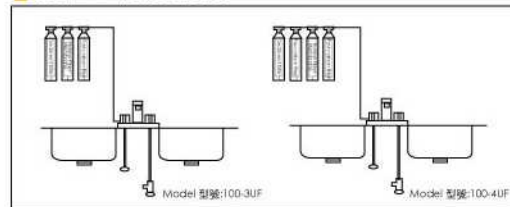

● WDF-105
Faucet
精美時尚水龍頭

安裝配件 Faucet attachments included



外牙咀可直駁DVC-16
分水嘴
Male Connector



內牙出水咀需加裝
AD-16配件後
再駁DVC-16分水嘴
Female Connector



Diverter Valves
Model DVC-16



Faucet Adapter
Model AD-16



● BASIC 3 Stage water system 三重過濾系統

Model 型號 :100-3UF

Net Weight淨重 :1.5 kg

Size 尺寸 :262W x 74D x 346H mm



● DELUXE 4 Stage water system 四重過濾系統

Model 型號 :100-4UF

Net Weight淨重 :2.7 kg

Size 尺寸 :345W x 74D x 360H mm

BASIC 100-3UF (3 stage) 100-3UF 三重過濾系統

Feed water 入水 → Pressure release valve (optional) 減壓掣(可選擇安裝) →
Sediment filter 沉澱物濾芯 → Hollow Fiber Membrane 中空絲膜濾芯 →
Post-carbon filter 後置式活性炭濾芯

DELUXE 100-4UF (4 stage) 100-4UF 四重過濾系統

Feed water 入水 → Pressure release valve (optional) 減壓掣(可選擇安裝) →
Sediment filter 沉澱物濾芯 → Pre-carbon filter 前置式活性炭濾芯 →
Hollow Fiber Membrane 中空絲膜濾芯 → Post-carbon filter 後置式活性炭濾芯