

Healthy living starts with i-water



i-water Quick Change Filtration System

Innovative — Patented Quick Change Filter Replacement

Convenient — Instant Kitchen Convenience

Compact — Simply the Best for Under-sink

Clean — Clean and Pure

Health — Retain Minerals for Health

Secured — Leakage Detected and Controlled

韓國製品
Made in Korea

The background of the page features a kitchen sink with a chrome faucet. To the left of the sink is a small potted herb plant in a white container. To the right is a larger potted herb plant in a white container. In the foreground on the right, a glass is being filled with water, creating bubbles. The overall color scheme is light blue and green with abstract circular patterns.

Water Filter System 淨水系統

SEDIMENT FILTER (5 microns)

Eliminates dirt, grit, sand, rust and other solid particles that can damage equipment and extends the life of post filters.

沉澱物濾芯 (5微米)

過濾泥沙、鐵銹及雜質，延長前置式活性炭濾芯的壽命，及避免設備受損。

PRE-CARBON FILTER

Removes dissolved trihalomethanes (THMs) and adsorbs chlorine, undesirable taste and odour in water.

前置式活性炭濾芯

消除三鹵甲烷，吸附水中的氯及其他異味。

Hollow Fiber Membrane (0.01 micron)

Spun with highly integrated techniques, hollow fiber membrane filter shows excellent water permeability. Using polysulfone as a membrane forming material, it has excellent chemical and heat resistance. Hollow fiber membrane filters out all harmful micro-organisms and bacteria yet preserves minerals.

中空絲膜濾芯 (0.01微米)

濾芯採用緊密編織技術，把耐熱物料紡成中空絲膜，滲透性特高。中空絲膜濾芯能過濾有害微生物及細菌，保留水中礦物質。

Post-carbon Filter


Removes dissolved trihalomethanes (THMs) and adsorbs chlorine, undesirable taste and odour in water to ensure a pure tasting water.

後置式活性炭濾芯

消除三鹵甲烷，吸附水中的氯及其他異味。

Installation 安裝方法


Choice 1 Under-sink installation 選擇一 櫥下式安裝

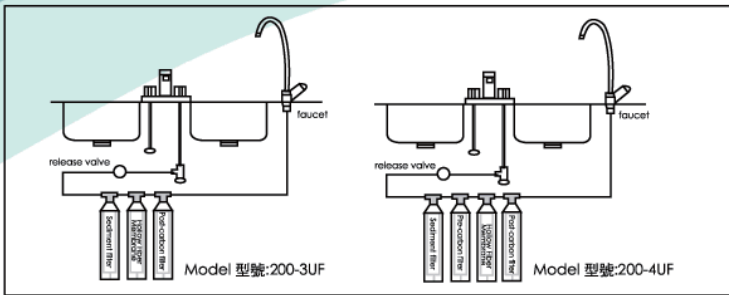

Faucet
精美時尚水龍頭

● WDF-106

Choice 2 Wall-mounted installation 選擇二 掛牆式安裝

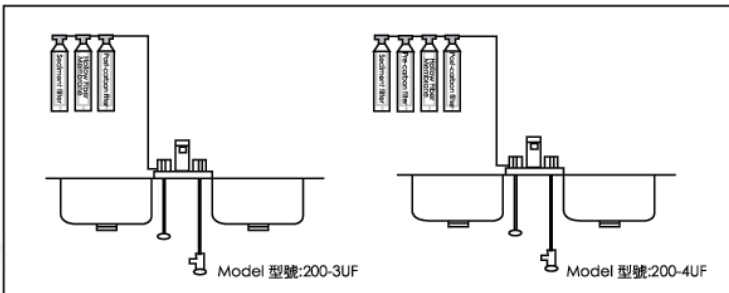

● Normal
Operation
運作正常



● Filter
Replacement
Reminder
更換濾芯提示

● WDF-106L

安裝配件 Faucet attachments included



● BASIC 3 Stage water system 三重過濾系統

Model 型號 :200-3UF
Net Weight淨重 :1.9 kg
Size 尺寸 :200W x 90D x 345H mm
Protective case:320W x 110D x 410H mm
保護膠箱

● DELUXE 4 Stage water system 四重過濾系統

Model 型號 :200-4UF
Net Weight淨重 :2.5 kg
Size 尺寸 :340W x 110D x 365H mm
Protective case:440W x 130D x 430H mm
保護膠箱

BASIC 200-3UF (3 stage) 200-3UF 三重過濾系統

Feed water 入水 → Leakage detector 防漏裝置 → Pressure release valve 減壓掣 →
Sediment filter 沉澱物濾芯 → Carbon filter 活性炭濾芯 →
Hollow Fiber Membrane 中空絲膜濾芯

DELUXE 200-4UF (4 stage) 200-4UF 四重過濾系統

Feed water 入水 → Leakage detector 防漏裝置 → Pressure release valve 減壓掣 →
Sediment filter 沉澱物濾芯 → Pre-carbon filter 前置式活性炭濾芯 →
Hollow Fiber Membrane 中空絲膜濾芯 → Post-carbon filter 後置式活性炭濾芯

4-stage Filter Replacement 四重濾芯更換時間表

Filter 濾芯	Replacement 更換時間	
	Up to 2,500 gal or 6 months 2,500 加侖或6個月	Up to 5,000 gal or 12 months 5,000 加侖 或 12 個月
Sediment Filter 沉澱物濾芯	✓	
Pre-carbon Filter 前置式活性炭濾芯	✓	
Hollow Fiber Membrane 中空絲膜濾芯		✓
Post-carbon Filter 後置式活性炭濾芯	✓	

3-stage Filter Replacement 三重濾芯更換時間表

Filter 濾芯	Replacement 更換時間	
	Up to 2,500 gal or 6 months 2,500 加侖或6個月	Up to 5,000 gal or 12 months 5,000 加侖 或 12 個月
Sediment Filter 沉澱物濾芯	✓	
Carbon Filter 活性炭濾芯	✓	
Hollow Fiber Membrane 中空絲膜濾芯		✓

Operation Conditions 操作條件

- Flow rate: 0.5gpm (1.9 L)
流量：0.5加侖/分鐘 (1.9升)

- Temperature: 33 ~ 100°F (4 ~ 38°C)
水溫：33 ~ 100°F (4 ~ 38°C)


Model 型號:200-3UF - Working pressure: 30 ~ 60 psi (2.1 ~ 4.2 kg)
水壓：30 ~ 60 磅/平方英寸 (2.1 ~ 4.2 公斤)

Model 型號:200-4UF - Working pressure: 30 ~ 60 psi (2.1 ~ 4.2 kg)
水壓：30 ~ 60 磅/平方英寸 (2.1 ~ 4.2 公斤)


Test Report 驗水報告 (Hong Kong Standards and Testing Centre) 香港標準及檢定中心



Model 型號:200-3UF

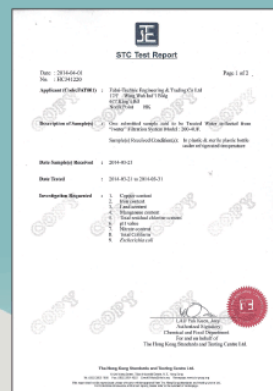

Model 型號:200-4UF

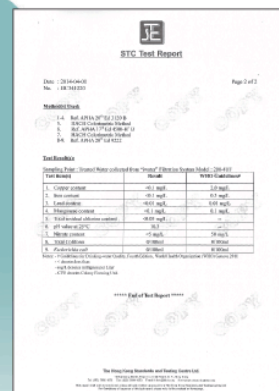

Since 1973

飛達工程貿易有限公司

FABRI-TECHNIC ENGINEERING & TRADING CO. LTD.

香港北角英皇道677號榮華工業大廈17樓

17/F., Wing Wah Industrial Building, 677 King's Road, North Point, Hong Kong

Tel: (852) 2815 8388 Fax: (852) 2815 3223

Website: www.fabri-technic.com Email: enquiry@fabri-technic.com