



健康之源 · 水源美

Healthy Living *starts with*
i-water

健康之源 · 水源美





FT250 Series



FT250 Series
Model : FT250-UV, FT250-3UF

Counter-top Bi-temp Water Dispenser

Casing Color	Fresh Grey
Dimension	310(W) x 310(D) x 630(H) mm
Net Weight	15 kg
Rated Voltage	220V, 50Hz, 2.8Amp
Power Consumption	450 W Heating Element
Storage Tank (Capacity)	Hot Water: 2 L (7.5 L/hr) Cold Water: 12 L (4.2 L/hr)
Water Temperature	Hot Water: keep warm at 88°C Cold Water: 4°C (Adjustable)
Refrigerant Model	R-134a 1/20 h.p.
Water Inlet	1/4 inch

FEATURES

- hot / cold available
- recessed temperature knobs
- childproof safety hot water tap
- durable casing resists scratches
- stainless steel water storage reservoir

OPTIONAL TREATMENT (remote unit)

- FT250-UV - activated carbon filtration for sediment and chlorine removal
- ultra-violet lamp sterilization (SUV-30)*
- FT250-3UF - sediment filter cartridge (5 microns)
- activated-carbon filter cartridge
- ultra fine hollow fiber membrane filter cartridge (0.01 micron)

FT250 系列
型號 : FT250-UV, FT250-3UF

座檯式冷熱飲水機

外殼	清新淺灰
尺寸	310(闊) x 310(深) x 630(高) 毫米
淨重	15 公斤
電壓	220V, 50Hz, 2.8安培
用電量	450 瓦發熱線
儲水缸 (容量)	熱水: 2 公升 (7.5 公升/小時) 冰水: 12 公升 (4.2 公升/小時)
水溫	熱水: 保持在 88°C 冰水: 4°C (可調較)
製冷器型號	1/20匹 R-134a環保型製冷機
來水接駁	1/4 吋

特色

- 熱、冰水可供選擇
- 外置溫度掣，方便調溫
- 兒童防燙保險掣
- 耐用易潔外殼，歷久常新
- 不銹鋼儲水缸

可選擇接駁 (外置式)

- 活性炭過濾
- 紫外光消毒 (SUV-30)*
- 沉澱物濾芯 (5 微米)
- 活性炭濾芯
- 精密中空絲膜濾芯 (0.01 微米)

* Simply connect SUV sterilizer to water supply. Water flows through a 2-stage filtration for sediment and chlorine removal while the ultra-violet sterilizer purifies water.
* SUV 殺菌器可直接接駁自來水，先過濾水中沉澱物，再利用活性炭清除化學雜質如氯氣等，然後以消毒紫外光代替煮沸過程徹底殺菌。另備停電故障自動斷水保護。
Specifications subject to change without prior notice.

傳統樽裝水的缺點 DISADVANTAGES OF BOTTLED DISTILLED WATER



■ 價錢昂貴
Expensive



■ 換樽麻煩
Tedious to handle



■ 缺乏礦物質
Absence of minerals



■ 佔用空間
Occupy large area



■ 運送經常延誤
Delivery delay



■ 水樽不潔
Hygienic problem

FT30SL Series



FT30SL Series
Model : FT30SL-UV, FT30SL-UF

Floor-stand Bi-temp Water Dispenser

Casing Color	Fresh Grey
Dimension	310(W) x 310(D) x 1040(H) mm
Net Weight	25 kg
Rated Voltage	220V, 50Hz, 2.8Amp
Power Consumption	450 W Heating Element
Storage Tank (Capacity)	Hot Water: 2 L (7.5 L/hr) Cold Water: 12 L (4.2 L/hr)
Water Temperature	Hot Water: keep warm at 88°C Cold Water: 4°C (Adjustable)
Refrigerant Model	R-134a 1/20 h.p.
Water Inlet	1/4 inch

FEATURES

- hot / cold available
- recessed temperature knobs
- childproof safety hot water tap
- durable casing resists scratches
- stainless steel water storage reservoir

OPTIONAL TREATMENT (built-in unit)

- FT30SL-UV
- activated carbon filtration for sediment and chlorine removal
 - ultra-violet lamp sterilization (SUV-30)*
- FT30SL-UF
- sediment filter cartridge (5 micron)
 - activated-carbon filter cartridge
 - ultra fine hollow fiber membrane filter cartridge (0.01 micron)

FT30SL 系列
型號: FT30SL-UV, FT30SL-UF

座地式冷熱飲水機

外殼	清新淺灰
尺寸	310(闊) x 310(深) x 1040(高) 毫米
淨重	25 公斤
電壓	220V, 50Hz, 2.8安培
用電量	450 瓦發熱線
儲水缸 (容量)	熱水: 2 公升 (7.5 公升/小時) 冰水: 12 公升 (4.2 公升/小時)
水溫	熱水: 保持在 88 °C 冰水: 4°C (可調節)
製冷器型號	1/20匹 R-134a環保型製冷機
來水接駁	1/4 吋

特色

- 熱、冰水可供選擇
- 外置溫度掣，方便調溫
- 兒童防護保險掣
- 耐用易潔外殼，歷久常新
- 不銹鋼儲水缸

可選擇接駁 (內置式)

- 活性炭過濾
- 紫外光消毒 (SUV-30)*
- 沉澱物濾芯 (5 微米)
- 活性炭濾芯
- 精密中空絲膜濾芯 (0.01 微米)

各項功能 FEATURES



一級 UV 淨化處理流程

Ultraviolet purification process




超精密 iwUV 淨化處理流程

Ultra fine i-water UV purification process



反滲透 R.O. 淨化處理流程

Reverse Osmosis purification process

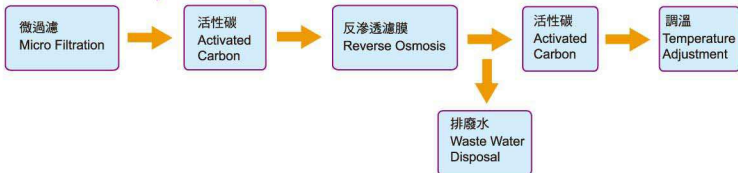

飛達工程貿易有限公司

FABRI-TECHNIC ENGINEERING & TRADING CO. LTD.

香港北角英皇道677號榮華工業大廈17樓

17/F., Wing Wah Industrial Building, 677 King's Road, North Point, Hong Kong

Tel: (852) 2815 8388 Fax: (852) 2815 3223

Website: www.fabri-technic.com E-mail: enquiry@fabri-technic.com

Since 1973

FT43/WWD/0803/1