

“FilTek” Water Chiller 冰水機 Model : FT-C12E



Origin: Korea
產地: 韓國


Dimension 尺寸	408 W 闊 x 205 D 深 x 278 H 高
Weight 重量	12.5 kg 公斤
Consumption 耗電量	120 W 瓦
Temp. Control 溫度控制	Auto 自動
Tank 水缸容量	1.8 litres (made of stainless steel) 公升 (不銹鋼物料)
Capacity 供水量	5 litres / hour 公升/小時
Allowed Pressure 可承受水壓	80 lbs 磅

機箱	防銹物料
冰水儲水缸	不銹鋼儲水缸 儲水缸外殼可自動蒸發冷卻凝結的水珠，不須排水。
調溫器	冰水溫度預設於35.6°F~53.6°F (2°C~12°C) 機背設有調溫掣，方便調溫。
製冷器	對流式高效能製冷系統，內設過載自動保護系統。
電源	220V~240V (+/-10%) 50/60Hz
雪種類型	R134a 環保雪種

CABINET	High quality material with strong corrosion resistance.
COLD WATER TANK	Stainless steel tank Refrigerant evaporator wrapped around the exterior of the tank.
COLD WATER THERMOSTAT	Temperature is preset between 35.6°F and 53.6°F (2°C~12°C). Adjustable thermostat is easily accessible at the back of the cabinet.
REFRIGERATION UNIT	Efficient convection condenser with automatic overload protector.
ELECTRICAL SUPPLY	220V~240V (+/-10%) 50/60Hz
REFRIGERANT TYPE	R134a

This unit is intended to be installed underneath a conventional kitchen sink, in a cabinet not less than 36" (914mm) wide (inside dimension). Chiller may be installed in any location in the cabinet and preferably a space of 5" (127mm) shall be allowed between the unit and cabinet walls. In order to provide sufficient air exchange for the unit, an air passage of around 20 square inches (130cm²) should be provided in the cabinet. The opening should be located as close to the unit as possible and can be made (1) in the toe space of the counter or (2) above the toe space.

此冰水機如安裝在櫥櫃內，需要預留空間作通風之用。櫥櫃內計闊度最少為36吋(914mm)。機身距離櫃背不宜少於5吋(127mm)。另，櫃腳需預留大約20平方吋(130cm²)的空隙作通風口，如圖(1)或圖(2)所示。機身宜接近通風口。

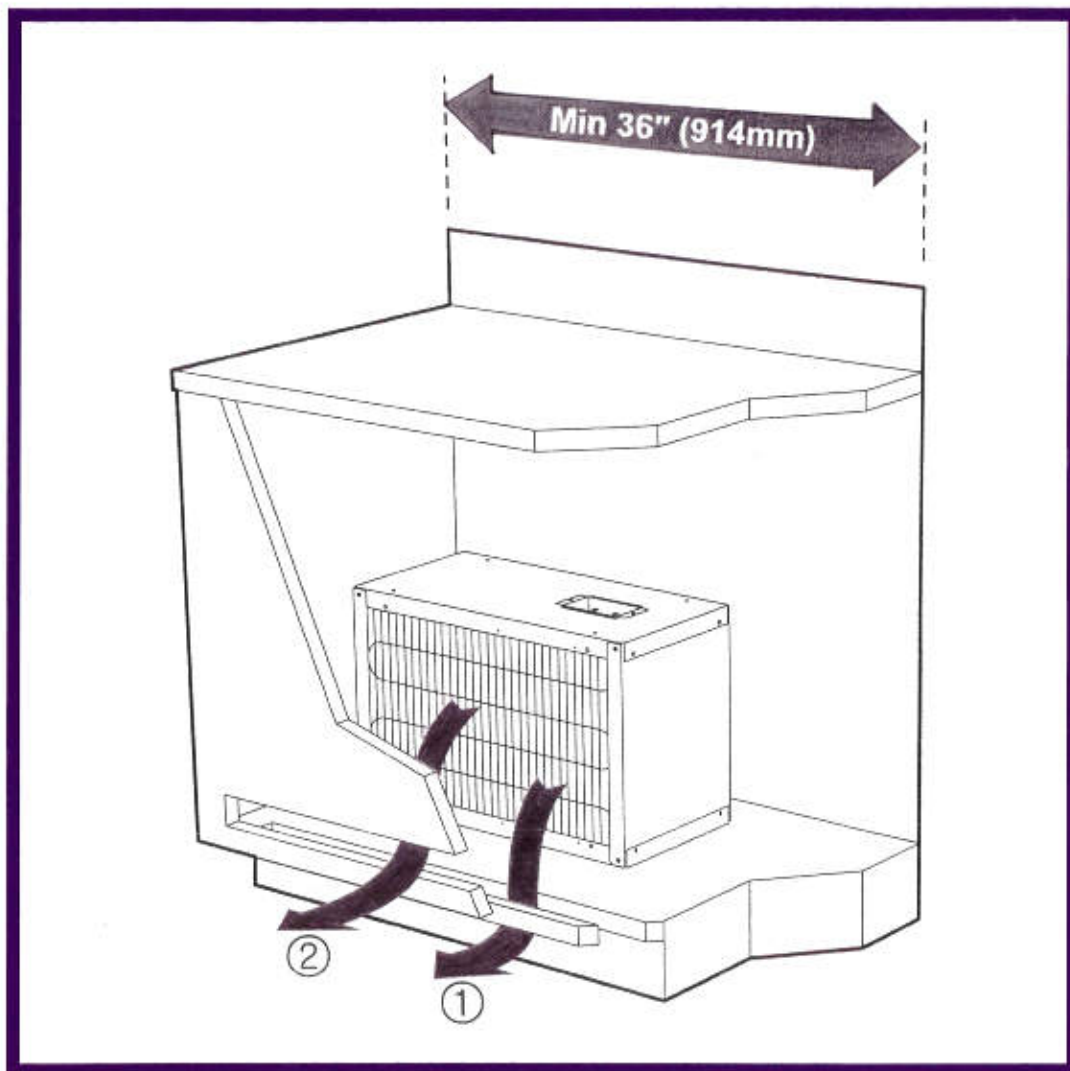

- * This chiller is designed to operate normally when the water pressure is around 15-80 psi. Our company bears no liability for damage caused by excessive water pressure.
- * 此冰水機的工作壓力設定在15-80磅之內，如客戶接駁冰水機至超過廠方設定之水壓上限，本公司不提供免費維修保養。



Since 1973

飛達工程貿易有限公司

FABRI-TECHNIC ENGINEERING & TRADING CO. LTD.

香港北角英皇道677號榮華工業大廈17字樓

17/F., WING WAH INDUSTRIAL BLDG., 677 KING'S ROAD, NORTH POINT, HONG KONG.

Tel: (852) 2815 8388 Fax: (852) 2815 3223 www.fabri-technic.com E-mail: enquiry@fabri-technic.com