

THE MOST POPULAR CHOICE!!

FilTek® Multi-function water dispenser/water fountain with UV purifier 飛達® 多用途飲水機 / 噴水盆兼內置紫外光淨化器

FT750C-UV features:

- cold water spouts
冷水出水管
- cold water fountain
冷水飲水盆噴泉
- water temperature knob
冷水溫度控制
- fail-proof auto shut-off device
故障自動斷水保險設計



Wall-hung type 掛牆式

Specifications :

Water Temperature:
Cold : 4°C - 8°C
Capacity : cold 8 l/hr.
Elect : 220-240 VAC, 50Hz, 300W
Dimensions : 410W x 335D x 700H mm
Connections : inlet 1/4"
drain 1/4"

FT850C-UV features:

- cold water spouts
冷水出水管
- cold water fountain
冷水飲水盆噴泉
- cold temperature knobs
冷水溫度控制
- fail-proof auto shut-off device
故障自動斷水保險設計



Floor-stand type 座地式

Specifications :

Water Temperature:
Cold : 4°C - 8°C
Capacity : cold 10 l/hr.
Elect : 220-240 VAC, 50Hz, 300W
Dimensions : 410W x 335D x 1270H mm
Connections : inlet 1/4"
drain 1/4"

FT850-UV features:


- hot / cold water spouts
冷/熱出水管
- cold water fountain
冷水飲水盆噴泉
- hot / cold temperature knobs
獨立冷/熱水溫度控制
- fail-proof auto shut-off device
故障自動斷水保險設計



Floor-stand type 座地式

Specifications :

Water Temperature:
Hot : 95°C ± 5°C
Cold : 4°C - 8°C
Capacity : hot / cold 10 l/hr.
Elect : 220-240 VAC, 50Hz, 960W
Dimensions : 410W x 335D x 1270H mm
Connections : inlet 1/4"
drain 1/4"

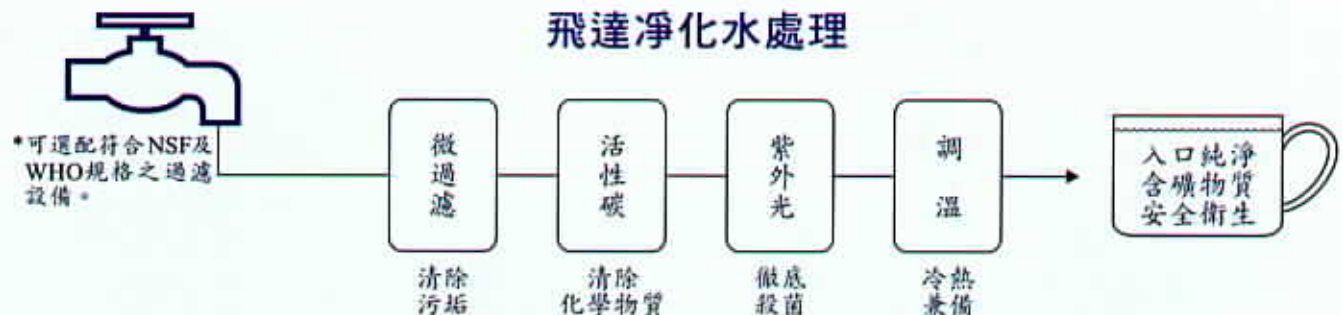

Since 1973

**FABRI-TECHNIC
ENGINEERING & TRADING CO., LTD.
飛達工程貿易有限公司**

TEL : (852) 2815 8388 FAX : (852) 2815 3223

Technically supported by specialists of 28 years experience in drinking water treatment.
具備28年飲水淨化處理經驗。