

Quick & Hot
快+熱



Instant Kitchen Convenience



Food & Drink



Cleaning & other uses



Baby care

Undersink Installation, Compact and Pleasant

www.fabri-technic.com

Quick & Hot Specifications and Features


快+熱規格

Capacity	流量	5/8 Gallon (2.3L), 60 cups per hour
Energy Consumption	耗電量	1300W
Current Flow Rate	電流量	5.9 Amp
Electrical Supply	電源	220 Volts 50 Hz
Temperature Range	溫度範圍	60°C (140°F) ~88°C (190°F)
Material of Outside Case	外殼物料	Powder Coated Steel
Material of Tank	儲水缸物料	Insulated stainless steel
Faucet	水龍頭	Open Vent Faucet required
Weight	淨重	7.6 lbs. (2.84 kg)
Dimensions (H x W x D)	體積	11.2" x 6.8" x 8.1"



“Open Vent” Faucets “開放式內胆”專用龍頭

Typical Installation 一般安裝

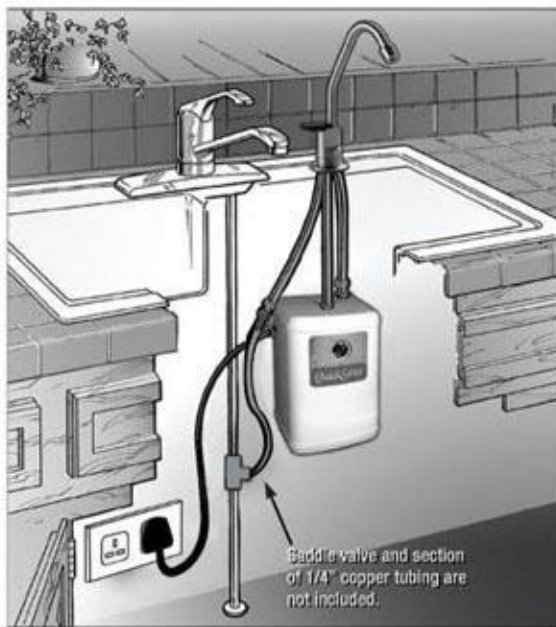

Sonoma Series (Hot only) 單熱

Available in Chrome 米黃色 (H610-CH), Brass 金黃色 (H610-BR), Satin Nickel 霧沙銀色 (H610-SH), Biscuit 灰黃色 (H610-BQ), and White 白色 (H610-WT)



Sierra Series (Dual Temperature) 冷熱

Available in Chrome 米黃色 (H620-CH), Brass 金黃色 (H620-BR), Satin Nickel 霧沙銀色 (H620-SH), Biscuit 灰黃色 (H620-BQ), and White 白色 (H620-WT)



Madera Series* (Dual Temperature) 冷熱

Available in Chrome 米黃色 (H720-CH), Brass 金黃色 (H720-BR), Satin Nickel 霧沙銀色 (H720-SH), Biscuit 灰黃色 (H720-BQ), and White 白色 (H720-WT)

* Madera-water chiller applicable 可接取獨立凍水機

Only “Open Vent” Faucets function with an instant hot water dispenser tank.
Connecting a standard faucet will damage the tank and void the warranty.
快+熱必須配用“開放式內胆”專用龍頭。接駁一般水龍頭會損壞熱水器及令保養失效



飛達工程貿易有限公司

FABRI-TECHNIC ENGINEERING & TRADING CO., LTD

香港北角英皇道677號榮華工業大廈17樓
17/F., Wing Wah Industrial Building, 677 King's Road, Hong Kong

Tel: (852) 2815 8388 Fax: (852) 2815 3223 Website: www.fabri-technic.com

